




INTERACTIVE KIOSK

INTERACTIVE KIOSK

WA-I320-FIK/ WA-I430-FIK/ WA-I490-FIK/
WA-I550-FIK/ WA-I650-FIK

DESCRIPTION

Discover the 32/43/49/55/65 Inch Infrared Touch Interactive Kiosk, designed to elevate user engagement. Featuring Full HD resolution (1920*1080) and responsive infrared touch technology, this kiosk ensures precise interaction and vibrant visuals with 300-350 cd/m² brightness. Ideal for retail, corporate, and educational environments, it offers a seamless user experience, supporting a range of applications like product displays, wayfinding, and interactive presentations. With multiple size options, it's the perfect solution for enhancing digital engagement in any space.

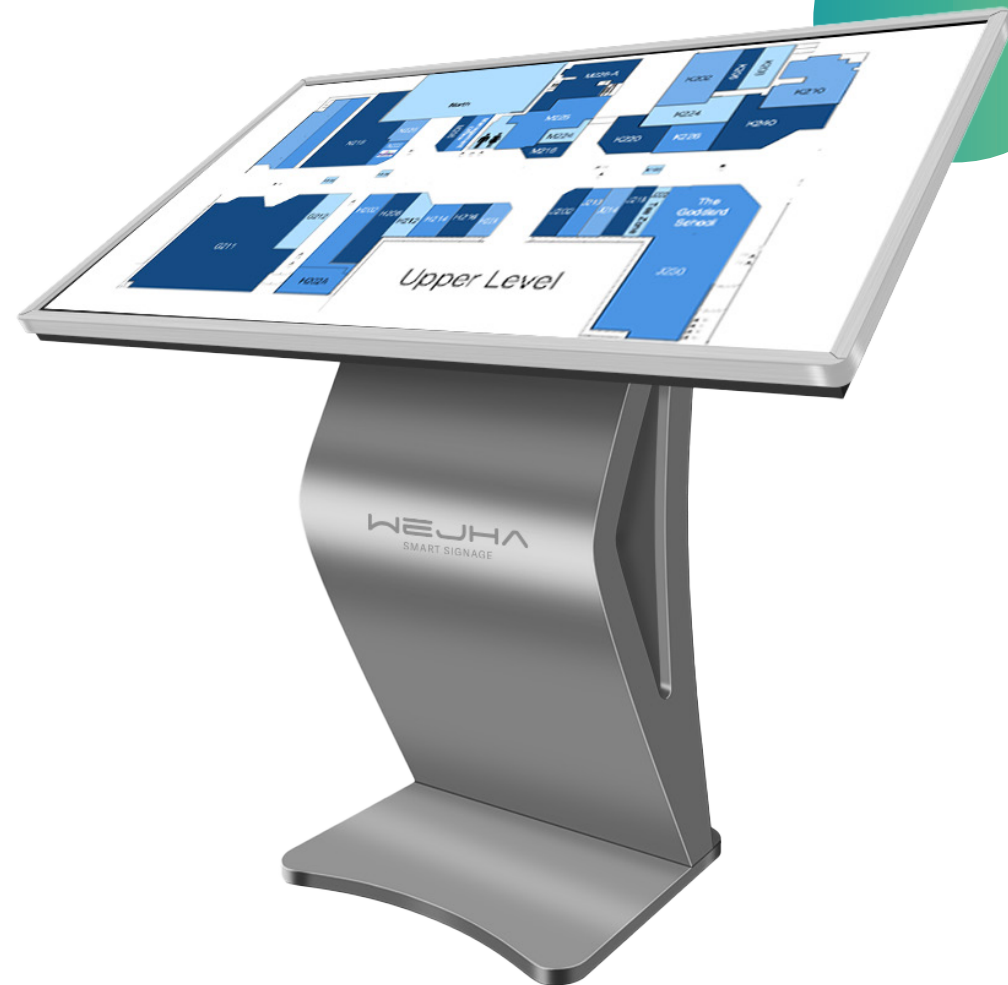

SPECIFICATIONS

Size	32 Inch	43 Inch	49 Inch	55 Inch	65 Inch
Model	WA-I320-FIK	WA-I430-FIK	WA-I490-FIK	WA-I550-FIK	WA-I650-FIK
Display Area	700.4*394.8mm	943*531.5mm	1075.8*606mm	1211*682mm	1428*803mm
Resolution	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080
Brightness	300-350cd/m ²	300-350cd/m ²	300-350cd/m ²	300-350cd/m ²	300-350cd/m ²
Contrast Ratio	4000:1	4000:1	4000:1	4000:1	4000:1
Viewing Angle	89/89/89/89 (up/down/left/right)	89/89/89/89 (up/down/left/right)	89/89/89/89 (up/down/left/right)	89/89/89/89 (up/down/left/right)	89/89/89/89 (up/down/left/right)
Touch Method	Infrared Touch/ Capacitive Touch	Infrared Touch/ Capacitive Touch	Infrared Touch/ Capacitive Touch	Infrared Touch/ Capacitive Touch	Infrared Touch/ Capacitive Touch
Operation System	Windows 10 (Optional)	Windows 10 (Optional)	Windows 10 (Optional)	Windows 10 (Optional)	Windows 10 (Optional)
Configuration	I5, 3 Generation 4+128G (I3, I7 Optional)	I5, 3 Generation 4+128G (I3, I7 Optional)	I5, 3 Generation 4+128G (I3, I7 Optional)	I5, 3 Generation 4+128G (I3, I7 Optional)	I5, 3 Generation 4+128G (I3, I7 Optional)
Output Port	VGA, HDMI, USB 2.0*4, RJ45 & RJ11, Audio I/O interface, RS232	VGA, HDMI, USB 2.0*4, RJ45 & RJ11, Audio I/O interface, RS232	VGA, HDMI, USB 2.0*4, RJ45 & RJ11, Audio I/O interface, RS232	VGA, HDMI, USB 2.0*4, RJ45 & RJ11, Audio I/O interface, RS232	VGA, HDMI, USB 2.0*4, RJ45 & RJ11, Audio I/O interface, RS232
Network	Wired Network/ WIFI Wireless Network, 3G/4G (Optional)	Wired Network/ WIFI Wireless Network, 3G/4G (Optional)	Wired Network/ WIFI Wireless Network, 3G/4G (Optional)	Wired Network/ WIFI Wireless Network, 3G/4G (Optional)	Wired Network/ WIFI Wireless Network, 3G/4G (Optional)

Power	≤90W	≤120W		≤150W	≤220W
Input Voltage	AC 110V ~ 240V 50/60HZ	AC 110V ~ 240V 50/60HZ	AC 110V ~ 240V 50/60HZ	AC 110V ~ 240V 50/60HZ	AC 110V ~ 240V 50/60HZ
Packing Size	850mm 550mm 145mm	1090mm 690mm 145mm		1360mm 835mm 145mm	
Net/Gross Weight	14.5KG/15KG	21KG/23KG		31KG/34KG	55KG/60KG

APPLICATION



FINANCE



EDUCATION



RETAIL



PROPERTY
MANAGEMENT



RESIDENCIAL



HEALTH CARE



GOVERNMENT



PUBLIC FACILITIES



ENERGY



ENTERPRISE